

## MPAGE1r

---

### PAGING STATIONS

#### *1-Zone Desktop Paging Station*



### PRODUCT OVERVIEW

MPAGE1r is a 1-zone desktop paging station, compatible with any device including a phantom-powered microphone input (SAM/eSAM series, DAM614, MIMO/MIMOSG series, CA series, HMA/eHMA series, etc.).



### KEY FEATURES

- 1 zone paging station
- PAGE key
- "PAGE ACTIVE" trigger port (GPO), for its connection to external devices (NO/NC selectable)
- Internal connections for a secure wiring
- Gooseneck condenser microphone
- Windscreen and connectors included (microphone cable not included)

### APPLICATIONS

- Paging, voice messages and speech

MECHANICAL DIAGRAMS

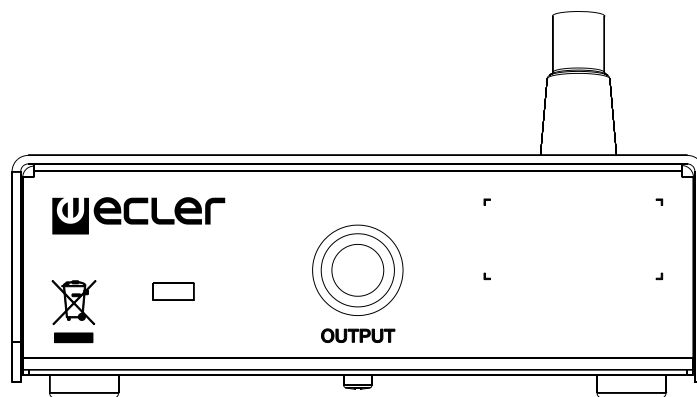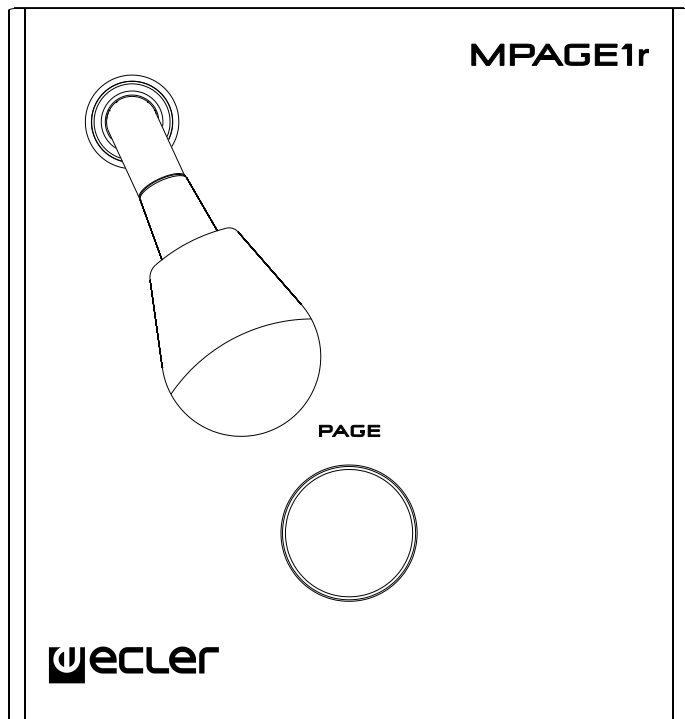

TECHNICAL DATA

<b>Microphone type</b>	Non-removable gooseneck condenser microphone
<b>Polar pattern</b>	Unidirectional
<b>Microphone frequency response</b>	50Hz – 18KHz (-10dB)
<b>Output level</b>	-24dBV @ 104dB SPL -34dBV @ 94dB SPL
<b>SNR</b>	70dB at 1kHz/1Pa
<b>Page mute</b>	80dB typ.
<b>Audio output</b>	Balanced, detachable 3 pole screw terminal
<b>Maximum audio cable length</b>	Twisted pair 5m; Shielded 60m
<b>Control output</b>	Open drain N channel mosfet N.C./N.O, internally selectable
<b>Control rating</b>	Max. +48VDC/0.1A
<b>Control connector</b>	Detachable 2 pole screw terminal
<b>Phantom power supply</b>	+10 to +48VDC
<b>Power consumption</b>	2mA
<b>Dimensions WxDxH (microphone excluded)</b>	120x126x43mm
<b>Weight</b>	625 g
<b>Included accessories</b>	Windscreen, connectors

All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.  
 Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 information@ecler.es [www.ecler.com](http://www.ecler.com)